

VSL173-HW

Industrial Touch Screen Monitor



www.short-circuit.com


Contents

- Specifications
- Ports
- Panel Buttons
- Changing Modes (HDMI/VGA)
- On Screen Display (OSD)
- Touch Screen Driver Installation
- Support

Specifications

Panel Size	17.3 inches
Aspect Ratio	16:9
Backlight Unit	LED, edge-light, replaceable
Resolution (native)	1920 x 1080 pixels
Touch Panel	5-wire resistive
Brightness	250 cd/m ²
Contrast	600:1
Input Signal	VGA, DVI, HDMI
Viewing Angle	70°/70°/60°/60°
Color System	PAL/NTSC
Size (L x W x H)	16 x 9.4 x 1.2 (in) / 40.6 x 24 x 3 (cm) (LxWxH) Screen: 15 x 8.5 (in) / 38.4 x 21.5 (cm)
Mounting	VESA 100 mounting holes

Ports

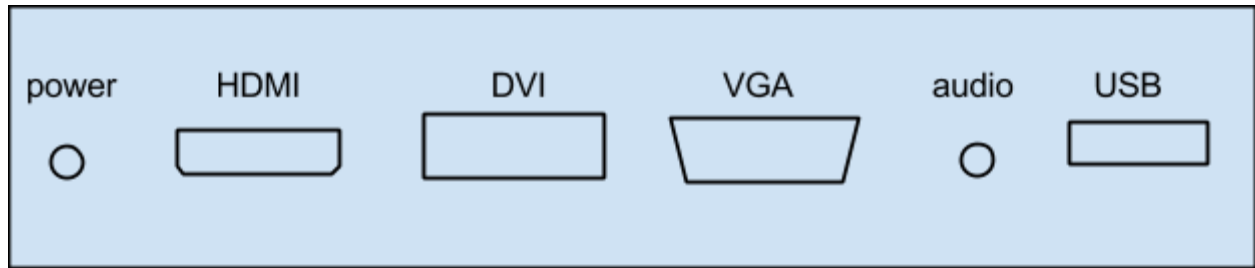

USB	USB input for touch screen functionality
HDMI	HDMI connector for HDMI input
VGA	VGA connector for VGA input
audio	no function
power	12V power jack connector

Panel Buttons

Power	Switches the monitor on and off LED bulb will turn green for on, and turn red for off. The LED bulb will turn off when there is no power.
MENU	Display the OSD (available only in VGA or HDMI modes) Also returns to the previous menu
UP	For selecting/changing OSD Settings
DOWN	For selecting/changing OSD Settings
BACK	Return to the previous menu

Changing Modes

1. Press the **M** (menu) button
2. Press the **UP/DOWN** button until you reach the Setup menu
3. Press the **M** button .
4. Press the **UP/DOWN** button until you reach the Input item
5. Press the **M** button
6. Press **UP/DOWN** button to select the input source
7. Press the **M** button to finalize your selection

On Screen Display (OSD)

The on screen display (OSD) displays settings for your monitor.

It can be activated by pressing the **MENU** button.

To select a menu item, use the **UP/DOWN** button. To enter a menu item, press the **MENU** button again.

Press the **BACK** button to go back one level.

Menu	Settings	Description
Picture		
Brightness	0-100	
Contrast	0-100	
Gamma	On/Off	
Color		
Color Temperature	5000K, 6500K, 7500K, 8200K, 9300K, 11500K, sRGB, USER	
Red	0-100	
Green	0-100	
Blue	0-100	

Setup		
Language	English/Chinese	OSD language
Mute	On/Off	
Input	VGA/DVI/HDMI	
DCR	On/Off	Dynamic Contrast Ratio
Display Size	Full Screen/4:3/Zoom	
Reset		reset monitor to factory settings
OSD		
Horizontal	0-100	
Vertical	0-100	
Transparency	0-4	
OSD Time Out	0-100	seconds to display the OSD
Position (VGA mode only)		
Phase	0-100	
Clock	0-100	
Horizontal	0-100	
Vertical	0-100	

Touch Screen Driver Installation

For the latest drivers and instructions please visit:

<http://www.short-circuit.com/support/drivers.html>

Support

For technical support, please visit

www.short-circuit.com

or email us at support@short-circuit.com